




BC FIBER
connect the future
B&C GROUP

Breakout Patch Cord LC-LC 7.0 MM

LSZH

Low Smoke Zero Halogen

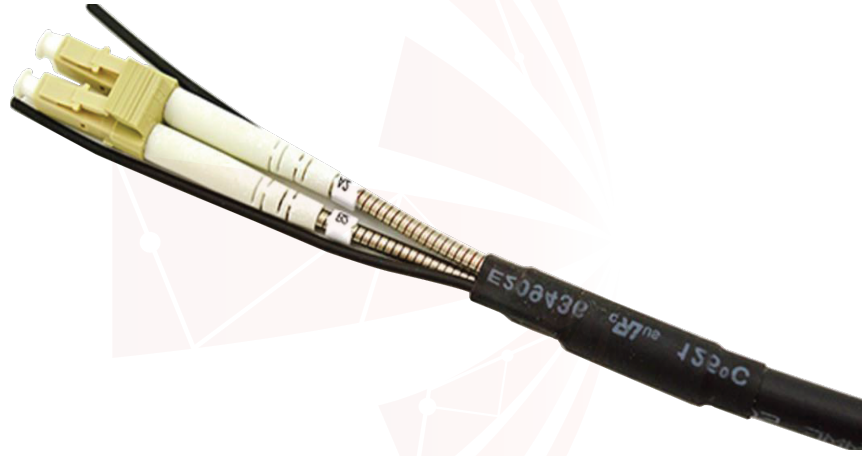

Technical parameters

NO	Item	Unit	Single Mode			Multi-Mode
1	Insertion loss	dB	≤0.30			≤0.30
2	Return loss	dB	PC	UPC	APC	/
			≥45	≥50	≥55	≥35
3	Repeatability	Db	0.2			
4	Working Times	Times	≥1000			
5	Operating Temperature		-40-85			
6	Optical Cable Diameter	mm	φ0.9,φ2.0,φ3.0			

3D Specification

Item	PC Polishing		APC Polishing		Schematic Diagram
Ferrule Diameter(mm)	2.5	1.25	2.5	1.25	
Radius of Curv (mm)	~25	7~25	5~15		
Fiber Height (um)	-100~50		±50		
Apex Offset(um)	50		50		
Angle(°)	N/A		8°±0.3°		

Product pictures

